




Feature:

- *Designed in USA, Made in China
- *Global Certificates.
- *Case Material: PC, GE brand
- * Fanless Design.
- * Fully sealed by ultrasonic welding.
- *Capacitor imported from Taiwan.
- *AC inlet: IEC320-C6,C8, C14 and Fixed inlet optional.
- *Protection: Over Load/Over Voltage/Over Current/Over Temp/Short-Circuit.
- *LED indicator show work status
- *Meet Energy Efficiency VI, Comply with CEC VI, DOE VI.
- *Comply With The Newest Safety Standard: UL62368, EN62368, IEC62368, IEC60950, IEC61558, IEC60335.
- *Brand Power Cord and DC Wire matched our products.
- *Customized Label and DC connector.




Electric Parameter:

DC Output	Output Voltage	5V	6V	9V	10V	12V	15V	18V	19V	20V	24V	28V	30V	36V	38V	42V	48V	55V	58V	
	Voltage Tolerance	±5%	±5%	±5%	±5%	±5%	±5%	±5%	±4%	±4%	±4%	±4%	±4%	±4%	±4%	±4%	±3%	±3%	±3%	
	Rated Current	9A	9A	8.5A	8A	7.5A	7A	5.5A	5A	5A	4A	3.5A	3A	2.5A	2.5A	2.5A	2A	1.8A	1.7A	
	Output Current	0-9A	0-9A	0-8.5A	0-8A	0-7.5A	0-7A	0-5.5A	0-5A	0-5A	0-4A	0-3.5A	0-3A	0-2.5A	0-2.5A	0-2.5A	0-2A	0-1.8A	0-1.7A	
	Ripple and Noise:	<150mVp-p																		
	LED Indicator	Green light when work																		
AC Input	Input Voltage Range	90~264Vac																		
	Rated Input Voltage:	100-240Vac																		
	Frequency Range:	47~62hz																		
	Input Current Max:	2A																		
	Inrush Current:	35A Max/240V																		
	Efficiency Min	86.5%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%
	No load Input Power	≤0.21W																		
	Leakage Current:	<0.25mA/240V																		
Protection	Over Load	When output power between 110%-135% of rated output power, turns to Hiccup mode.																		
	Over Voltage	When output voltage between 110%-135% of rated output voltage, turns to Hiccup mode.																		
	Over Current	Hiccup mode, recovers automatically after fault condition is removed																		
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed																		
Environment	Operating Temp:	0°C~+45°C																		
	Storage Temp:	-30°C~+70°C																		
	Relative Humidity:	10%~90%																		
	Vibration and Shock	Meet MIL-STD-810D																		
Safety	Safety Standard	IEC62368, IEC60065, IEC60950, IEC61558, IEC60335																		
	EMC/EMI	Meet FCC CLASS B, EN55022 CLASS B.																		
	EMS	EN61000—4—2/3/4/5																		
	Drop Testing	3 drops from 1 m height on a hard wooden surface																		
Life Time	MTBF	50000 Hours																		
	Warranty	3 years																		
Dimension	L137*W57*H35.5mm(Tab:30mm)																			
Drawing	See next page																			
Packing	48pcs/CTN, CTN size: L40*W34*H34CM																			
Color	Black or White																			


Drawing(mm): Without Tab

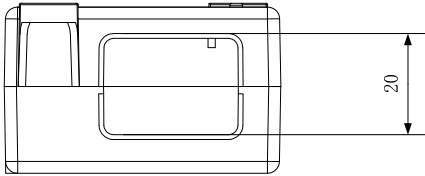




AC Inlet Type	IEC 320-C6	IEC 320-C14	IEC 320-C8
AC入力コネクタ			
AC輸入類型			<input checked="" type="checkbox"/>

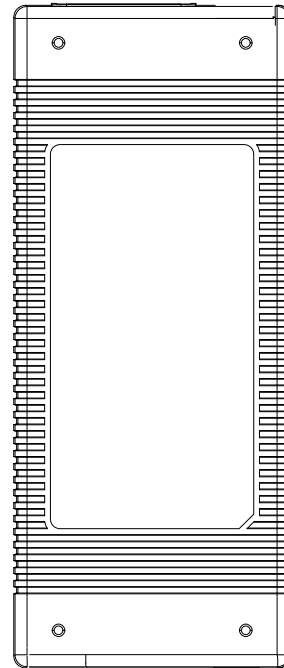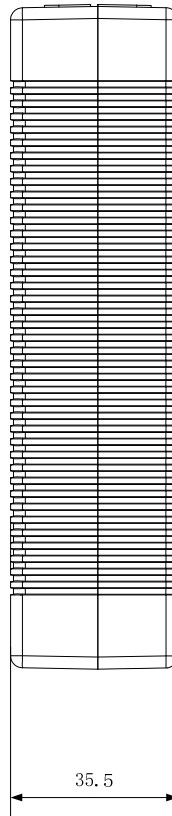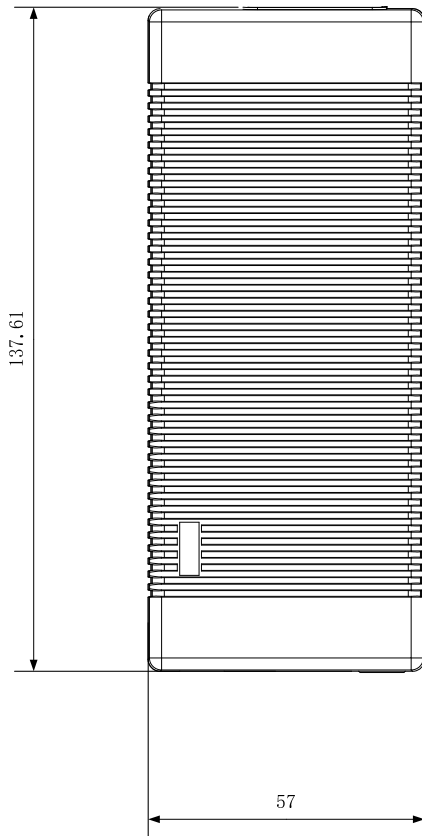

Drawing(mm):With Tab

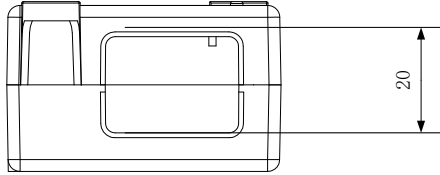


AC Inlet Type	IEC 320-C6	IEC 320-C14	IEC 320-C8
AC入力コネクタ			
AC輸入類型			<input checked="" type="checkbox"/>

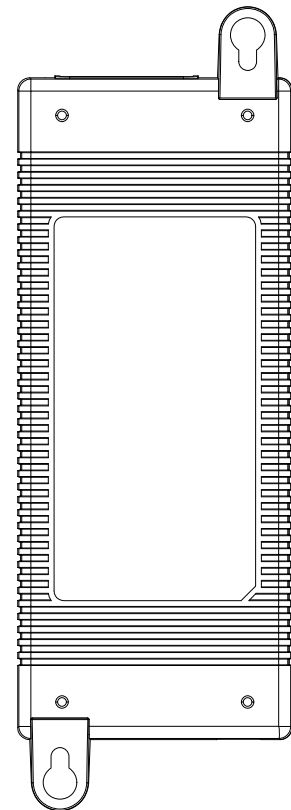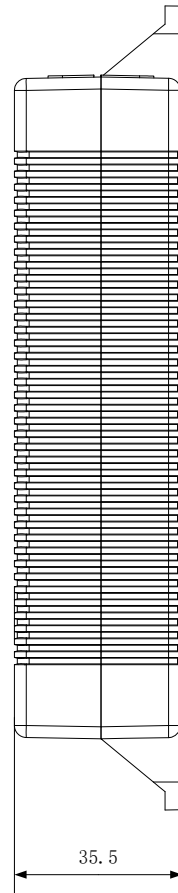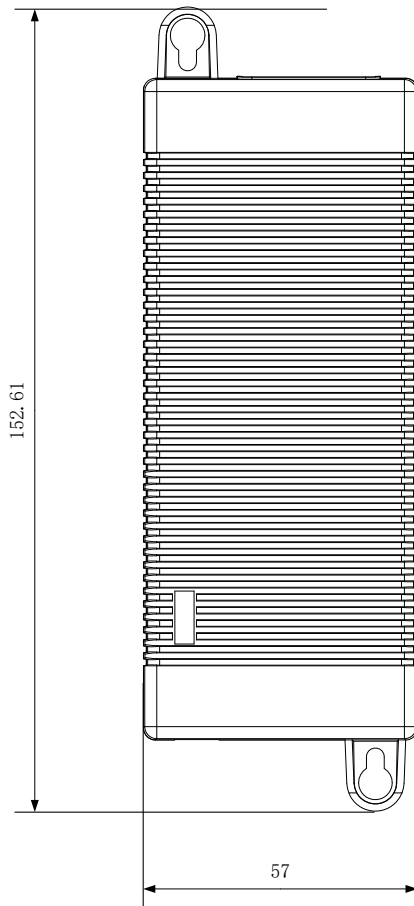

Model List:

Model Name instruction:

E.G.: XSG xxx yyyy zz

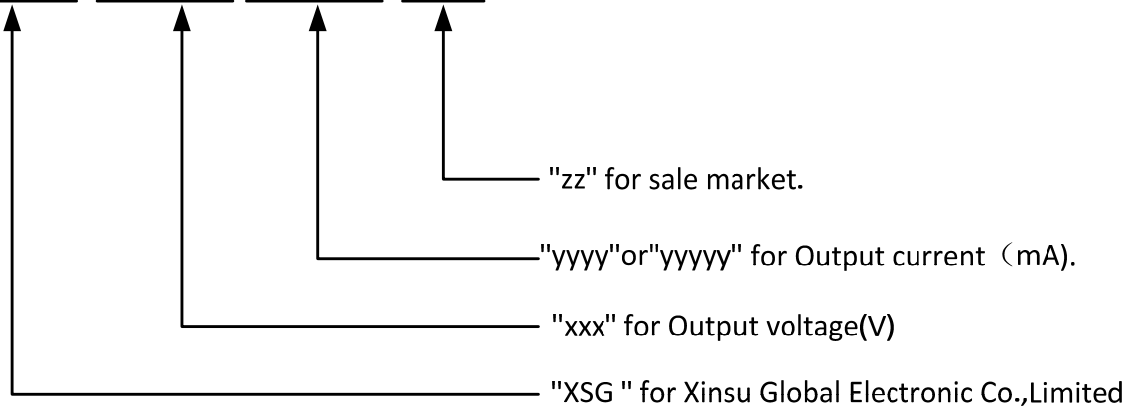

Model No	AC Input	Power Rate	Output Voltage(V)	Output Current(mA)
XSG0508000	100 ~ 240	40.0	5	8000
XSG0508500	100 ~ 240	42.5	5	8500
XSG0509000	100 ~ 240	45.0	5	9000
XSG0608000	100 ~ 240	48.0	6	8000
XSG0608500	100 ~ 240	51.0	6	8500
XSG0609000	100 ~ 240	54.0	6	9000
XSG0658000	100 ~ 240	52.0	6.5	8000
XSG0608500	100 ~ 240	55.3	6.5	8500
XSG0659000	100 ~ 240	58.5	6.5	9000
XSG0727500	100 ~ 240	54.0	7.2	7500
XSG0728000	100 ~ 240	57.6	7.2	8000

XSG0728500	100 ~ 240	61.2	7.2	8500
XSG0729000	100 ~ 240	64.8	7.2	9000
XSG0737500	100-240	54.8	7.3	7500
XSG0738000	100-240	58.4	7.3	8000
XSG0738500	100-240	62.1	7.3	8500
XSG0739000	100-240	65.7	7.3	9000
XSG0757500	100 ~ 240	56.3	7.5	7500
XSG0758000	100 ~ 240	60.0	7.5	8000
XSG0758500	100 ~ 240	63.8	7.5	8500
XSG0759000	100 ~ 240	67.5	7.5	9000
XSG0847500	100 ~ 240	63.0	8.4	7500
XSG0848000	100 ~ 240	67.2	8.4	8000
XSG0848500	100 ~ 240	71.4	8.4	8500
XSG0907000	100 ~ 240	63.0	9	7000
XSG0907500	100 ~ 240	67.5	9	7500
XSG0908000	100 ~ 240	72.0	9	8000
XSG0908500	100 ~ 240	76.5	9	8500
XSG1006500	100 ~ 240	65.0	10	6500
XSG1007000	100 ~ 240	70.0	10	7000
XSG1007500	100 ~ 240	75.0	10	7500
XSG1008000	100 ~ 240	80.0	10	8000

XSG1008500	100 ~ 240	85.0	10	8500
XSG1106000	100 ~ 240	66.0	11	6000
XSG1106500	100 ~ 240	71.5	11	6500
XSG1107000	100 ~ 240	77.0	11	7000
XSG1107500	100 ~ 240	82.5	11	7500
XSG1108000	100 ~ 240	88.0	11	8000
XSG1205500	100 ~ 240	66.0	12	5500
XSG1206000	100 ~ 240	72.0	12	6000
XSG1206500	100 ~ 240	78.0	12	6500
XSG1207000	100 ~ 240	84.0	12	7000
XSG1207500	100 ~ 240	90.0	12	7500
XSG1265500	100 ~ 240	69.3	12.6	5500
XSG1266000	100 ~ 240	75.6	12.6	6000
XSG1266500	100 ~ 240	81.9	12.6	6500
XSG1267000	100 ~ 240	88.2	12.6	7000
XSG1305000	100 ~ 240	65.0	13	5000
XSG1305500	100 ~ 240	71.5	13	5500
XSG1306000	100 ~ 240	78.0	13	6000
XSG1306500	100 ~ 240	84.5	13	6500
XSG1307000	100 ~ 240	91.0	13	7000
XSG1355000	100 ~ 240	67.5	13.5	5000

XSG1355500	100 ~ 240	74.3	13.5	5500
XSG1356000	100 ~ 240	81.0	13.5	6000
XSG1356500	100 ~ 240	87.8	13.5	6500
XSG1357000	100 ~ 240	94.5	13.5	7000
XSG1405000	100 ~ 240	70.0	14	5000
XSG1405500	100 ~ 240	77.0	14	5500
XSG1406000	100 ~ 240	84.0	14	6000
XSG1406500	100 ~ 240	91.0	14	6500
XSG1407000	100 ~ 240	98.0	14	7000
XSG1464500	100 ~ 240	65.7	14.6	4500
XSG1465000	100 ~ 240	73.0	14.6	5000
XSG1465500	100 ~ 240	80.3	14.6	5500
XSG1466000	100 ~ 240	87.6	14.6	6000
XSG1466500	100 ~ 240	94.9	14.6	6500
XSG1504500	100 ~ 240	67.5	15	4500
XSG1505000	100 ~ 240	75.0	15	5000
XSG1505500	100 ~ 240	82.5	15	5500
XSG1506000	100 ~ 240	90.0	15	6000
XSG1604500	100 ~ 240	72.0	16	4500
XSG1605000	100 ~ 240	80.0	16	5000
XSG1605500	100 ~ 240	88.0	16	5500

XSG1606000	100 ~ 240	96.0	16	6000
XSG1624500	100 ~ 240	72.9	16.2	4500
XSG1625000	100 ~ 240	81.0	16.2	5000
XSG1625500	100 ~ 240	89.1	16.2	5500
XSG1626000	100 ~ 240	97.2	16.2	6000
XSG1684000	100 ~ 240	67.2	16.8	4000
XSG1684500	100 ~ 240	75.6	16.8	4500
XSG1685000	100 ~ 240	84.0	16.8	5000
XSG1685500	100 ~ 240	92.4	16.8	5500
XSG1704000	100 ~ 240	68.0	17	4000
XSG1704500	100 ~ 240	76.5	17	4500
XSG1705000	100 ~ 240	85.0	17	5000
XSG1705500	100 ~ 240	93.5	17	5500
XSG1804000	100 ~ 240	72.0	18	4000
XSG1804500	100 ~ 240	81.0	18	4500
XSG1805000	100 ~ 240	90.0	18	5000
XSG1805500	100 ~ 240	99.0	18	5500
XSG1834000	100 ~ 240	73.2	18.3	4000
XSG1834500	100 ~ 240	82.4	18.3	4500
XSG1835000	100 ~ 240	91.5	18.3	5000
XSG1903500	100 ~ 240	66.5	19	3500

XSG1903750	100 ~ 240	71.3	19	3750
XSG1904000	100 ~ 240	76.0	19	4000
XSG1904500	100 ~ 240	85.5	19	4500
XSG1904740	100 ~ 240	90.1	19	4740
XSG1904750	100 ~ 240	90.3	19	4750
XSG1905000	100 ~ 240	95.0	19	5000
XSG1953500	100 ~ 240	68.3	19.5	3500
XSG1954000	100 ~ 240	78.0	19.5	4000
XSG1954500	100 ~ 240	87.8	19.5	4500
XSG1954620	100 ~ 240	90.1	19.5	4620
XSG1955000	100 ~ 240	97.5	19.5	5000
XSG2003250	100 ~ 240	65.0	20	3250
XSG2003500	100 ~ 240	70.0	20	3500
XSG2004000	100 ~ 240	80.0	20	4000
XSG2004500	100 ~ 240	90.0	20	4500
XSG2103500	100 ~ 240	73.5	21	3500
XSG2104000	100 ~ 240	84.0	21	4000
XSG2104500	100 ~ 240	94.5	21	4500
XSG2203000	100 ~ 240	66.0	22	3000
XSG2203500	100 ~ 240	77.0	22	3500
XSG2204000	100 ~ 240	88.0	22	4000

XSG2204500	100 ~ 240	99.0	22	4500
XSG2253000	100 ~ 240	67.5	22.5	3000
XSG2253500	100 ~ 240	78.8	22.5	3500
XSG2254000	100 ~ 240	90.0	22.5	4000
XSG2254500	100 ~ 240	101.3	22.5	4500
XSG2403000	100 ~ 240	72.0	24	3000
XSG2403250	100 ~ 240	78.0	24	3250
XSG2403500	100 ~ 240	84.0	24	3500
XSG2403750	100 ~ 240	90.0	24	3750
XSG2404000	100 ~ 240	96.0	24	4000
XSG2523000	100 ~ 240	75.6	25.2	3000
XSG2523500	100 ~ 240	88.2	25.2	3500
XSG2524000	100 ~ 240	100.8	25.2	4000
XSG2553000	100 ~ 240	76.5	25.5	3000
XSG2553500	100 ~ 240	89.3	25.5	3500
XSG2702500	100 ~ 240	67.5	27	2500
XSG2703000	100 ~ 240	81.0	27	3000
XSG2703500	100 ~ 240	94.5	27	3500
XSG2802500	100 ~ 240	70.0	28	2500
XSG2803000	100 ~ 240	84.0	28	3000
XSG2803500	100 ~ 240	98.0	28	3500

XSG2902500	100 ~ 240	72.5	29	2500
XSG2903000	100 ~ 240	87.0	29	3000
XSG2903500	100 ~ 240	101.5	29	3500
XSG2922500	100 ~ 240	73.0	29.2	2500
XSG2923000	100 ~ 240	87.6	29.2	3000
XSG2942500	100 ~ 240	73.5	29.4	2500
XSG2943000	100 ~ 240	88.2	29.4	3000
XSG3002500	100 ~ 240	75.0	30	2500
XSG3003000	100 ~ 240	90.0	30	3000
XSG3202500	100 ~ 240	80.0	32	2500
XSG3202750	100 ~ 240	88.0	32	2750
XSG3203000	100 ~ 240	96.0	32	3000
XSG3302000	100 ~ 240	66.0	33	2000
XSG3302500	100 ~ 240	82.5	33	2500
XSG3302750	100 ~ 240	90.8	33	2750
XSG3303000	100 ~ 240	99.0	33	3000
XSG3362000	100 ~ 240	67.2	33.6	2000
XSG3362500	100 ~ 240	84.0	33.6	2500
XSG3362750	100 ~ 240	92.4	33.6	2750
XSG3363000	100 ~ 240	100.8	33.6	3000
XSG3402000	100 ~ 240	68.0	34	2000

XSG3402500	100 ~ 240	85.0	34	2500
XSG3402750	100 ~ 240	93.5	34	2750
XSG3502000	100 ~ 240	70.0	35	2000
XSG3502500	100 ~ 240	87.5	35	2500
XSG3502750	100 ~ 240	96.3	35	2750
XSG3601800	100 ~ 240	64.8	36	1800
XSG3602000	100 ~ 240	72.0	36	2000
XSG3602500	100 ~ 240	90.0	36	2500
XSG3652000	100 ~ 240	73.0	36.5	2000
XSG3652500	100 ~ 240	91.3	36.5	2500
XSG3782000	100 ~ 240	75.6	37.8	2000
XSG3782500	100 ~ 240	94.5	37.8	2500
XSG3802000	100 ~ 240	76.0	38	2000
XSG3802500	100 ~ 240	95.0	38	2500
XSG4022000	100 ~ 240	80.4	40.2	2000
XSG4201750	100 ~ 240	73.5	42	1750
XSG4202000	100 ~ 240	84.0	42	2000
XSG4202250	100 ~ 240	94.5	42	2250
XSG4252000	100 ~ 240	85.0	42.5	2000
XSG4302000	100 ~ 240	86.0	43	2000
XSG4321500	100 ~ 240	64.8	43.2	1500

XSG4322000	100 ~ 240	86.4	43.2	2000
XSG4381500	100 ~ 240	65.7	43.8	1500
XSG4382000	100 ~ 240	87.6	43.8	2000
XSG4401500	100 ~ 240	66.0	44	1500
XSG4402000	100 ~ 240	88.0	44	2000
XSG4501500	100 ~ 240	67.5	45	1500
XSG4502000	100 ~ 240	90.0	45	2000
XSG4601500	100 ~ 240	69.0	46	1500
XSG4602000	100 ~ 240	92.0	46	2000
XSG4621500	100 ~ 240	69.3	46.2	1500
XSG4622000	100 ~ 240	92.4	46.2	2000
XSG4751500	100 ~ 240	71.3	47.5	1500
XSG4752000	100 ~ 240	95.0	47.5	2000
XSG4801500	100 ~ 240	72.0	48	1500
XSG4801750	100 ~ 240	84.0	48	1750
XSG4802000	100 ~ 240	96.0	48	2000
XSG5041500	100 ~ 240	75.6	50.4	1500
XSG5042000	100 ~ 240	100.8	50.4	2000
XSG5101500	100 ~ 240	76.5	51	1500
XSG5111500	100 ~ 240	76.7	51.1	1500
XSG5111750	100 ~ 240	89.4	51.1	1750

XSG5461250	100 ~ 240	68.3	54.6	1250
XSG5461500	100 ~ 240	81.9	54.6	1500
XSG5461750	100 ~ 240	95.6	54.6	1750
XSG5481250	100 ~ 240	68.5	54.8	1250
XSG5481500	100 ~ 240	82.2	54.8	1500
XSG5501250	100 ~ 240	68.8	55	1250
XSG5501500	100 ~ 240	82.5	55	1500
XSG5601500	100 ~ 240	84.0	56	1500
XSG5801250	100 ~ 240	72.5	58	1250
XSG5801500	100 ~ 240	87.0	58	1500
XSG5841250	100 ~ 240	73.0	58.4	1250
XSG5841500	100 ~ 240	87.6	58.4	1500
XSG5841750	100 ~ 240	102.2	58.4	1750
XSG5881250	100 ~ 240	73.5	58.8	1250
XSG5881500	100 ~ 240	88.2	58.8	1500